

Gas hob in AISI 304 stainless steel. 1.5 mm thick pressed top without flue apertures, designed for back-to-back alignment and to accommodate the water column accessory. Appliance comprises 2 sealed burners. Safety tap with thermocouple for continuous output control. Main burner ignition by means of permanent, low-energy pilot burner. Pilot burner and thermocouple are located underneath the main burner body, protected from accidental impact and any spills. Hob features radiused corners for ease of cleaning and pan supports in RAAF enamelled cast-iron (acid, alkali and flame resistant).

STANDARD FEATURES

- 1.5mm thick pressed stainless steel tops
- Modular design
- Interlocking device supplied with all units
- Flame failure and standing pilot light
- Natural to Propane gas conversion kit
- External gas regulator supplied (specify gas type)


OPTIONAL FEATURES

- Cabinet base and doors
- Hygienic cabinet base with pressed runners
- Refrigerated base
- 50mm stainless steel frame for worktop installed on refrigerated base or countertop
- Flexible gas hose with quick disconnect



DIMENSIONS
External: 730D x 400W x 250H mm
TECHNICAL DATA
Gas Type: Natural or Propane
Total Output (Gas): Natural Gas - 43.2MJ/h Propane Gas - 43.2MJ/h
Burners: 2 x 21.6MJ
Gas Connection: 1/2"
AGA approval number: 7410
SHIPPING DATA
Net Weight: 27kg
Shipping Weight: 34kg
Shipping Dimensions: 430W x 840L x 550H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

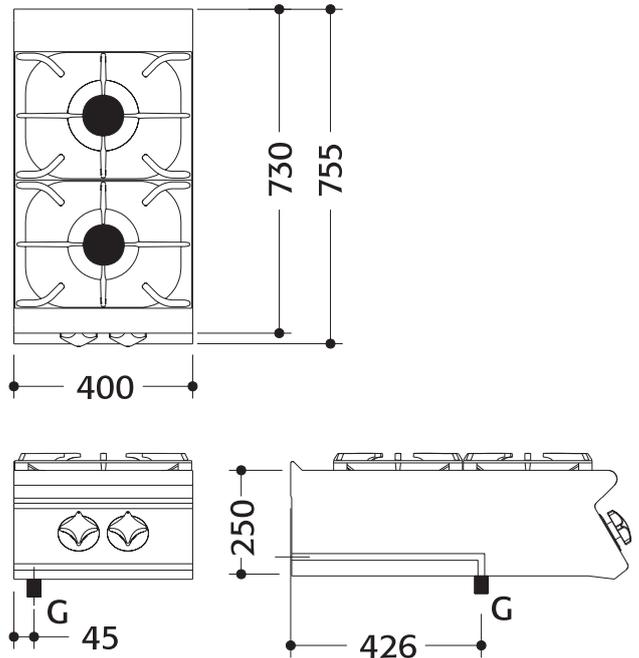

LEGEND
G = Gas