

Camshelving®

PREMIUM
series

ELEMENTS
series

BASICS
series



CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Shelving for Life



STORAGE REDEFINED.

With three distinct lines of Camshelving®, all kitchens are created equal!

Every foodservice operation deserves to be set up for maximized cost savings, space efficiency, sanitation, food safety and functionality no matter what the size or budget.

Camshelving storage systems make it all possible, helping foodservice operators optimize organization, support food safety, improve labor savings, simplify inventory management, reduce food waste, and eliminate replacement costs.



Cambro storage and transportation products that help ensure food safety handling.



COMPONENT

Products that meet the NSF International criteria for sanitation and cleanability.



Certifies products approved by Technischer Überwachungs-Verein. (Technical Inspection Association)



Products that help meet HACCP guidelines.



Fit for food products



Dishwasher Safe



Cadmium-free products



Recyclable polypropylene

camguard
ANTIMICROBIAL SHELF PLATES

Antimicrobial protection permanently molded into shelf plates to inhibit the growth of mold, fungus and bacteria.

04 CAMSHELVING® key features

06 COMPARISON quick reference guide

08 PRODUCT CODE reference guide

10 OVERALL LENGTH quick reference guide

12 PREMIUM series

24 ELEMENTS series

34 BASICS series

Camshelving is covered under the following US Patents:

D498,664 S, D508,646 S, D512,867 S, D623,929 S, D624,764 S, D648,582 S, D630,935 S, D648,159 S, D651,433 S, D648,160 S, D697,391 S, D727,715 S, D728,347 S, D728,348 S, D707,994 S, D739,989 S, D663,912 S, D736,488 S, D739,989 S, US 6,981,454B2

CAMSHELVING®

THE COMMON AND KEY FEATURES OF ALL CAMSHELVING SERIES

Rust and Corrosion Free


Backed by a lifetime warranty against rust and corrosion, Camshelving storage systems eliminate the inconvenience and costs associated with restoring or replacing degraded shelving. Only Cambro offers Shelving for Life.



Multi Environment Use


Camshelving storage systems are designed to withstand all extreme storage applications and temperatures — impervious to moisture, chemicals, salt, food acids, and humidity. Camshelving systems can be installed anywhere and will never rust.

-38°C TO 88°C

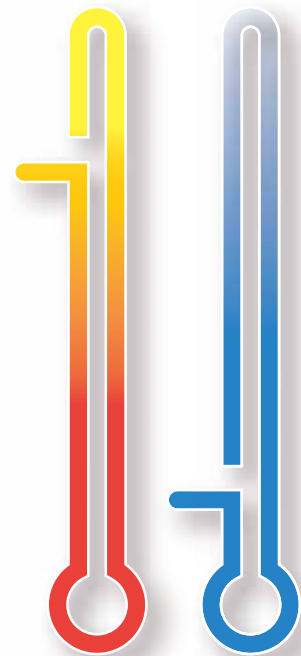


Maximized Space Utilization

Components have been thoughtfully designed to maximize storage space, even in space-restricted areas.

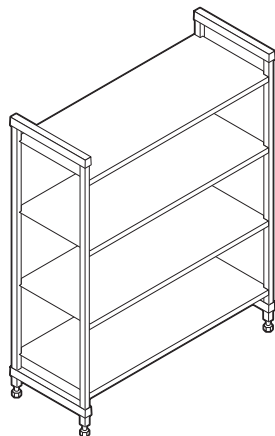

Starter Unit

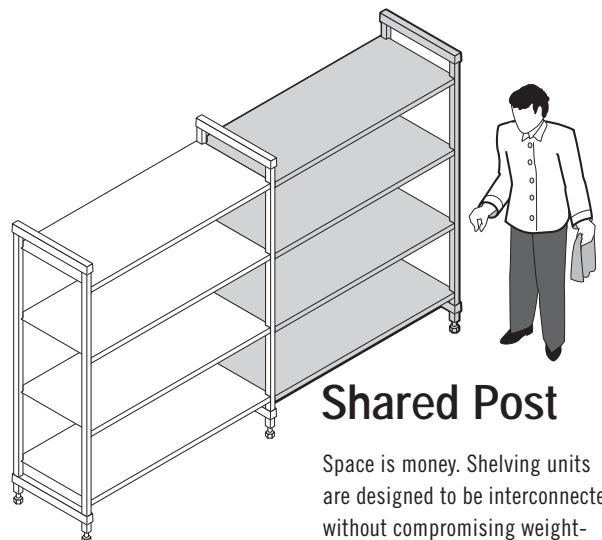

Starter + Add-On Unit

Shared Post

Space is money. Shelving units are designed to be interconnected, without compromising weight-bearing capacity all while maximizing usable storage space.

PREMIUM series

ELEMENTS series

BASICS series


Easy to Clean

Cleaning shelving shouldn't be a major production. Whether daily or scheduled, cleaning can be done quickly and easily without interrupting storage space or normal, day-to-day operations.




Easy to Adjust

Each shelf can be easily and independently adjusted to accommodate a variety of storage products and packages as product and storage needs change.

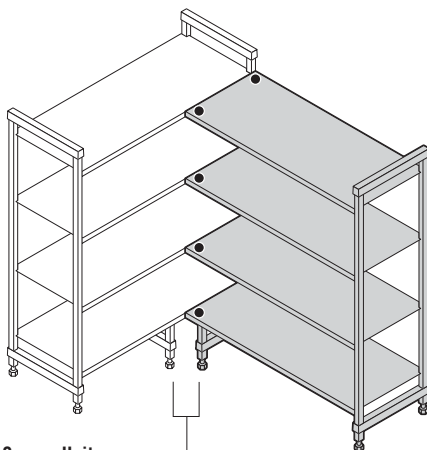

Corner Unit
Starter + Add-On Unit
using 1 set of Corner
Connectors per shelf
and 2 Dunnage Stands.

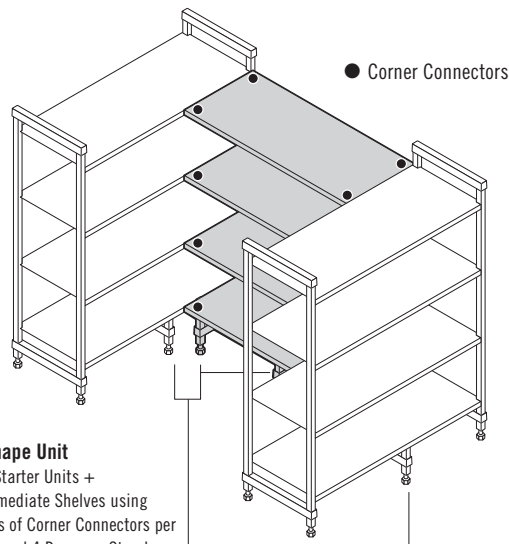

U-Shape Unit
Two Starter Units +
Intermediate Shelves using
2 sets of Corner Connectors per
shelf and 4 Dunnage Stands.

Corner Shelf Space

Convert unusable space into continuous, easy-access storage areas using corner connectors.

Camshelving® Series

Quick Reference Guide

Cambro offers three rust-free, non-corrosive, hygienic shelving systems that will hold up to the tough demands of commercial foodservice operations. This guide will help you choose the ideal Camshelving system for each storage area in your operation. Only Cambro offers Shelving for Life.



PREMIUM series

Storage Areas	High-volume foodservice operations with constant loading and off-loading of heavy products. Frequent and/or multiple daily deliveries. Wet Storage - Walk-in Freezers, Coolers, Warewashing Areas Dry Storage - Bulk Foods, Catering Equipment, China/Dishware, Linen, Merchandising.
Recommended Market Segments	Hotels and Casinos, Restaurants, Quick-Serve Restaurants, Schools, Colleges and Universities, Healthcare, Military, Convention Centers/Stadiums, Cruise Ships, Caterers and Banquet Centers, Corporate Dining, Convenience and Grocery Stores.
Product Material	Posts and traverses are made from a steel core with smooth polypropylene exterior. Superior strength and durable enough to withstand the heaviest loading demands.
Assembly	Molded in dovetails means fewer parts, making it the easiest to assemble.
Weight-Bearing Capacity (based on 610 - 1220 mm length)	Stationary Unit: 363 kg per shelf, 1451 kg per unit. Mobile Unit: 340 kg per unit. Corner and U-Shape Unit: 181 kg per shelf, 726 kg per unit.
Lifetime Warranty Against Rust & Corrosion	Shelf Plates, Posts and Traverses
Shelf Lengths	610, 760, 910, 1070, 1220, 1380, 1530, 1830 mm
Shelf Depths	360, 460, 540, 610 mm
Post Heights	Stationary: 820, 1430, 1630, 1830, 2140 mm Mobile: 890, 1500, 1700, 1910 mm (includes casters)
Mobile Units	YES
High Density Storage Floor Track System	YES
Bottom Shelf Dunnage Stand	YES
Shelf Rails	YES
Vertical Drying and Storage Cradle (Trays / Cutting Boards / Lids)	YES
Dome Drying and Storage Cradle	YES
Angled Drying and Storage Cradle	YES
Shelf Divider (Narrow Item Storage)	YES
Shelf Divider Bar (for Food Pans or Food Boxes)	YES
Tray Sliding Rack	YES
Single Shelf Security Cage	YES
Full Wrap Security Cage	YES

ACCESSORIES



ELEMENTS series

High-volume foodservice operations with constant loading and off-loading of medium to heavy products. 5-7 deliveries per week.

Wet Storage - Walk-in Freezers, Coolers, Warewashing Areas

Dry Storage - Bulk Foods, Catering Equipment, China/Dishware, Linen, Merchandising.

Hotels and Casinos, Restaurants, Quick-Serve Restaurants, Schools, Colleges and Universities, Healthcare, Military, Convention Centers/Stadiums, Cruise Ships, Caterers and Banquet Centers, Corporate Dining, Convenience and Grocery Stores.

Posts and traverses are made from a revolutionary composite material that is light in weight yet strong enough to withstand rigorous loading conditions.

Easy to assemble.

Stationary Unit: 363 kg per shelf, 1451 kg per unit.
Mobile Unit: 340 kg per unit.
Corner and U-Shape Unit: 181 kg per shelf, 726 kg per unit.

Shelf Plates, Posts and Traverses

610, 760, 910, 1070, 1220, 1380, 1530, 1830 mm

360, 460, 540, 610 mm

Stationary: 1630, 1830, 2140 mm
Mobile: 1778, 1980 mm (includes casters)

YES

NO

YES

NO

YES

YES

YES

YES

YES

YES

YES

NO

BASICS series

Medium-volume foodservice operations with constant loading and off-loading of light to medium products. 2-5 deliveries per week.

Wet Storage - Walk-in Freezers, Coolers, Warewashing Areas

Dry Storage - Bulk Foods, Catering Equipment, China/Dishware, Linen, Merchandising and Disposables.

Hotels and Casinos, Restaurants, Quick-Serve Restaurants, Schools, Colleges and Universities, Healthcare, Convention Centers/Stadiums, Caterers and Banquet Centers, Corporate Dining, Convenience Stores, Yogurt Shops and Cafés.

Posts and traverses are made from the same revolutionary composite material as Elements Series.
 Slim design is lighter in weight, yet durable and strong enough to withstand a wide variety of storage conditions.

Easy to assemble.

Stationary Unit: 272 kg per shelf, 998 kg per unit.
Corner and U-Shape Unit: 136 kg per shelf, 544 kg per unit.

Shelf Plates, Posts and Traverses

760, 910, 1070, 1220, 1380, 1530 mm

460, 540, 610 mm

Stationary: 1630, 1830, 2140 mm

NO

NO

YES

NO

YES

YES

YES

YES

NO

YES

YES

NO

Product Code Reference Guide

Cambro's new product codes have been simplified making it easier to identify the type of unit or accessory required. Code numbers are composed of 3 parts.

1. **Prefix** – Defines the shelving brand and type of unit being selected.
2. **Dimensions** – Identifies the depth, length and height.
3. **Suffix** – Type and quantity of shelves.

Complete Units

CP Camshelving® Premium Series



CPU	Stationary Starter Unit
CPA	Stationary Add-On Unit
CPMU	Mobile Unit
CPHU	High Density Mobile Unit

E Camshelving Elements Series

ESU	Stationary Starter Unit
EA	Stationary Add-On Unit
EMU	Mobile Unit

CB Camshelving Basics Series

CBU	Stationary Starter Unit
CBA	Stationary Add-On Unit

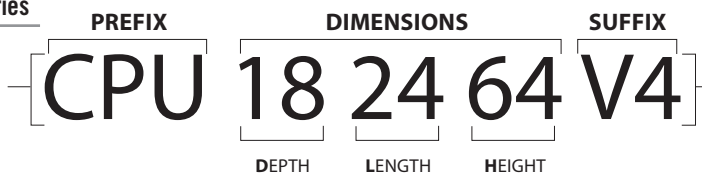

V4 4 Vented Shelves

V5 5 Vented Shelves

S4 4 Solid Shelves

S5 5 Solid Shelves

VS4 3 Vented Shelves + 1 Solid Shelf

VS5 4 Vented Shelves + 1 Solid Shelf

V4PKG* 4 Vented Shelves

V5PKG* 5 Vented Shelves

S4PKG* 4 Solid Shelves

S5PKG* 5 Solid Shelves

VS4PKG* 3 Vented Shelves + 1 Solid Shelf

VS5PKG* 4 Vented Shelves + 1 Solid Shelf

* Premium Series only - 2140 mm high units and 1830 mm long units, all heights.

Post Kits and Shelf Kits

CP Camshelving® Premium Series



CPSK	Stationary Shelf Kit
CPPK	Stationary Post Kit
CPMPK	Mobile Post Kit

E Camshelving Elements Series

ESK	Stationary Shelf Kit
EPK	Stationary Post Kit
EMSK	Mobile Shelf Kit
EMPK	Mobile Post Kit

CB Camshelving Basics Series

CBSK	Stationary Shelf Kit
CBPK	Stationary Post Kit

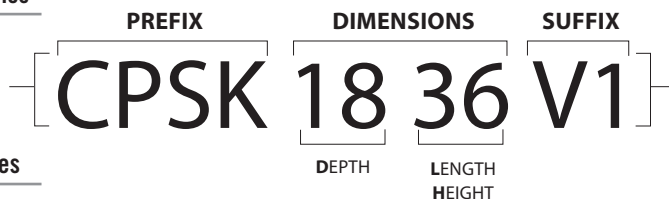

V1 1 Vented Shelf

S1 1 Solid Shelf

V4 4 Vented Shelves

V5 5 Vented Shelves

S4 4 Solid Shelves

S5 5 Solid Shelves

VS4 3 Vented Shelves + 1 Solid Shelf

VS5 4 Vented Shelves + 1 Solid Shelf

Accessories

If an accessory is used by more than 1 line of shelving, the code will start with CS.

If an accessory is only used in one line of shelving, the code will start by the prefix letters of the line.

Example: Corner Connectors:

- a. **CPCC1** = Camshelving Premium Corner Connector Set
- b. **ECC1** = Camshelving Elements Corner Connector Set
- c. **CBCC1** = Camshelving Basics Corner Connector Set

FREE Camshelving® Design Service

In order to select the most suitable and cost effective storage system, Cambro offers customized shelving illustrations using our proprietary shelving design program. Space allocation, operational flow and organizational challenges are quickly addressed when selecting the right product for the storage application. Usable storage space is maximized using the least number of units to help operators manage equipment costs. Once all required information is received, our expert shelving consultants prepare a 2D and 3D recommended floor plan along with an itemized product list by room/area. Proposals are completed and emailed within 24-48 business day hours, depending on number of rooms and complexity. We look forward to designing the perfect storage solution for you. Call or email today to connect with one of our Camshelving consultants.

CAMBRO USA: 1(714) 230-4113






shelving@cambro.com

CAMBRO EUROPEAN LOGISTICS: (49)7022 90 100 0

cambroeuropa@cambro.com



It's Simple! To Get Started, Please Provide:

- Project Name
- Storage Room Type (freezer / cooler)
- Room(s) Dimensions (L x W x H)
- Doorway / Entryway Location & Dimension
- Obstructions (condenser / pipes)
- Additional Preferences / Requirements

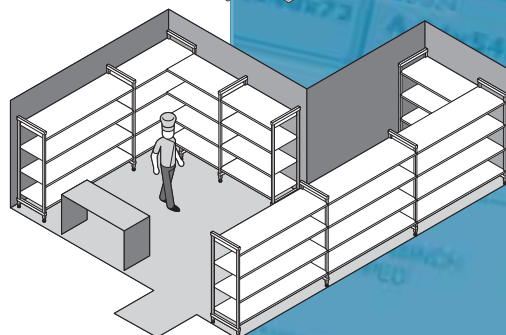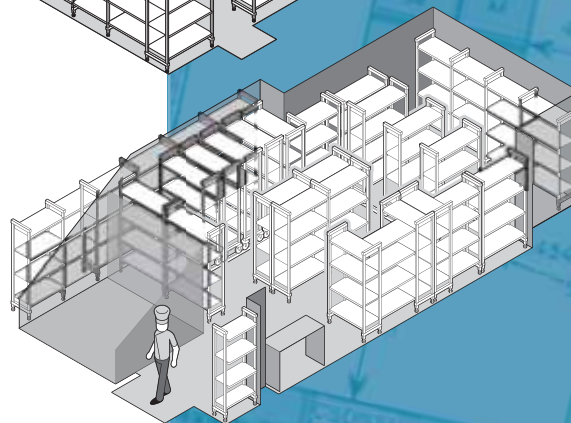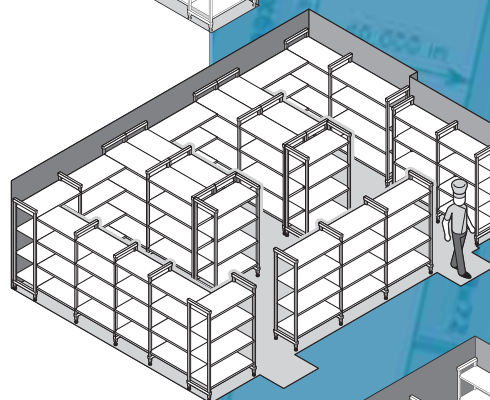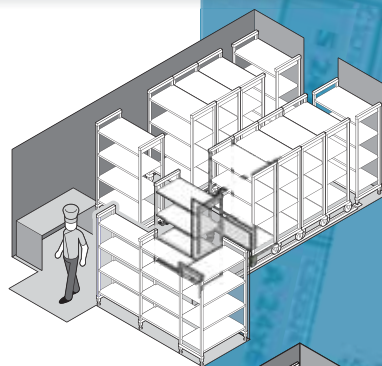
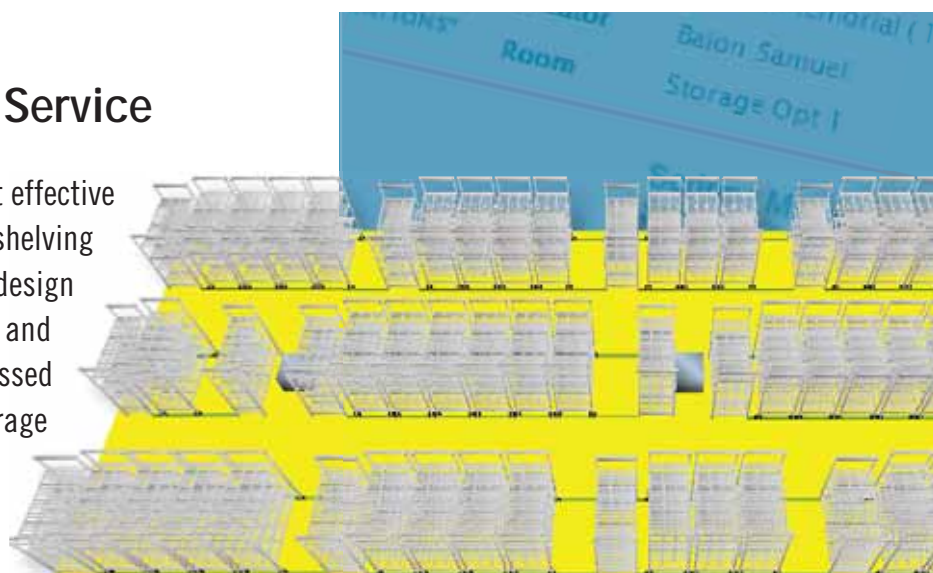


Camshelving® Series Overall Length - Quick Reference Guide



Straight Unit: Starter Unit + Add-On Unit with Shared Posts

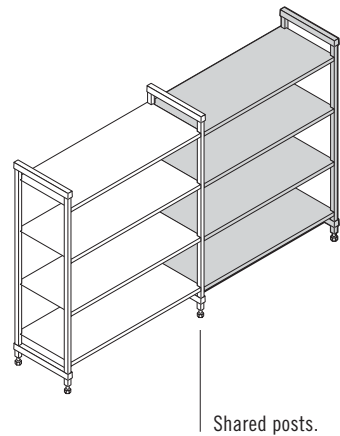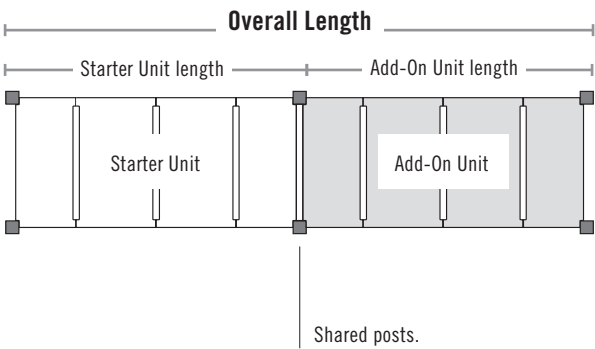

Corner Unit: Starter Unit + Add-On Unit with Corner Connectors

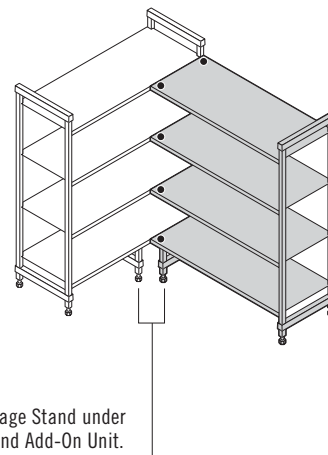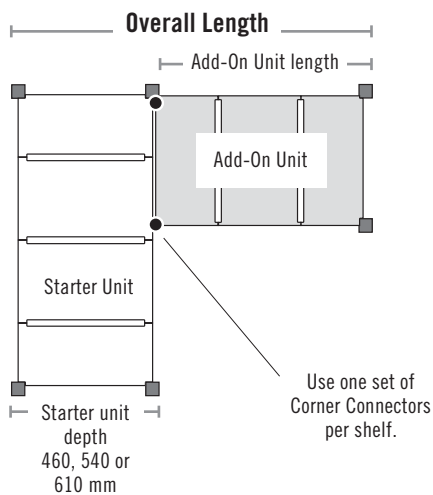

U-Shape Unit: Two Starter Units + Intermediate Shelves with Corner Connectors

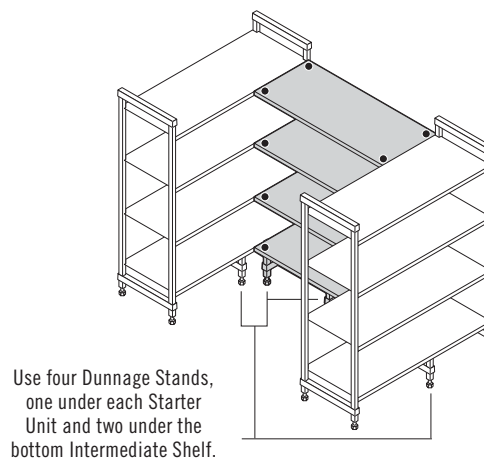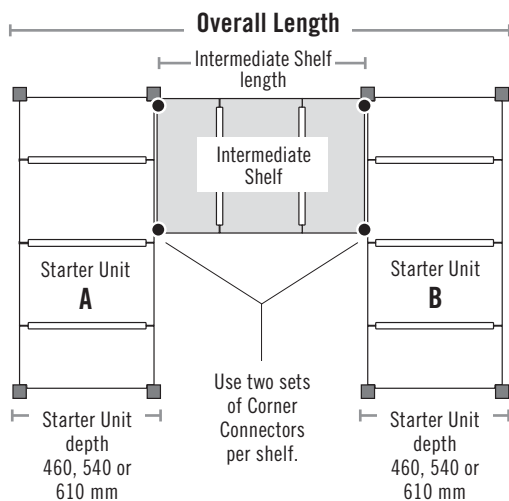

Straight Unit: Starter Unit + Add-On Unit with Shared Posts

PREMIUM / BASICS SERIES					ELEMENTS SERIES				
STARTER & ADD-ON UNIT	STARTER UNIT ACTUAL LENGTH		ADD-ON UNIT ACTUAL LENGTH		OVERALL LENGTH	STARTER UNIT ACTUAL LENGTH		ADD-ON UNIT ACTUAL LENGTH	OVERALL LENGTH
610	610	+	565	=	1175	610	+	559	= 1169
760	760	+	720	=	1480	760	+	714	= 1474
910	910	+	870	=	1780	910	+	864	= 1774
1070	1070	+	1025	=	2095	1070	+	1019	= 2089
1220	1220	+	1175	=	2395	1220	+	1169	= 2389
1380	1380	+	1330	=	2710	1380	+	1324	= 2704
1530	1530	+	1480	=	3010	1530	+	1474	= 3004
1830	1830	+	1790	=	3620	1830	+	1784	= 3614

610 and 1830 are not available in Camshelving Basics Series.

Corner Unit: Starter Unit + Add-On Unit with Corner Connectors

PREMIUM / ELEMENTS / BASICS SERIES					PREMIUM / ELEMENTS / BASICS SERIES					PREMIUM / ELEMENTS / BASICS SERIES				
ADD-ON UNIT	ADD-ON UNIT ACTUAL LENGTH		460 MM STARTER UNIT DEPTH	OVERALL LENGTH	ADD-ON UNIT ACTUAL LENGTH		540 MM STARTER UNIT DEPTH	OVERALL LENGTH		ADD-ON UNIT ACTUAL LENGTH		610 MM STARTER UNIT DEPTH	OVERALL LENGTH	
610	585	+	460	= 1045	585	+	540	= 1125		585	+	610	= 1195	
760	740	+	460	= 1200	740	+	540	= 1280		740	+	610	= 1350	
910	890	+	460	= 1350	890	+	540	= 1430		890	+	610	= 1500	
1070	1045	+	460	= 1505	1045	+	540	= 1585		1045	+	610	= 1655	
1220	1195	+	460	= 1655	1195	+	540	= 1735		1195	+	610	= 1805	

610 mm unit not available in Camshelving Basics Series.

U-Shape Unit: Two Starter Units + Intermediate Shelves with Corner Connectors

PREMIUM / ELEMENTS / BASICS SERIES					PREMIUM / ELEMENTS / BASICS SERIES					PREMIUM / ELEMENTS / BASICS SERIES				
INTERMEDIATE SHELF	INTERMEDIATE SHELF ACTUAL LENGTH		460 MM DEPTH STARTER UNIT A+B	OVERALL LENGTH	INTERMEDIATE SHELF ACTUAL LENGTH		540 MM DEPTH STARTER UNIT A+B	OVERALL LENGTH		INTERMEDIATE SHELF ACTUAL LENGTH		610 MM DEPTH STARTER UNIT A+B	OVERALL LENGTH	
910	865	+	920	= 1785	865	+	1080	= 1945		865	+	1220	= 2085	
1070	1020	+	920	= 1940	1020	+	1080	= 2100		1020	+	1220	= 2240	
1220	1170	+	920	= 2090	1170	+	1080	= 2250		1170	+	1220	= 2390	

CAMSHELVING® PREMIUM series

WHY CHOOSE PREMIUM?

In high volume foodservice operations with frequent deliveries and constant loading and off-loading of products, stability, strength and sanitary storage should never be compromised. Premium Series does precisely what it was designed to do – hold the heaviest products with the roughest handling, in any environment and it is the easiest to clean and adjust.



All Environments
-38°C TO 88°C

Stationary

High Density

Mobile

camguard®
ANTIMICROBIAL SHELF PLATES



COMPONENT



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Full Wrap Security Cage, Single Shelf Security Cage, Tray Slide Rack, Shelf Rails, Shelf Divider Bars, High Density Track and Extension Kits are not NSF Listed.




storage needs
HEAVY

daily
deliveries
FREQUENT


Camshelving® Premium Series Stationary Unit Sizes

Mobile Unit Sizes

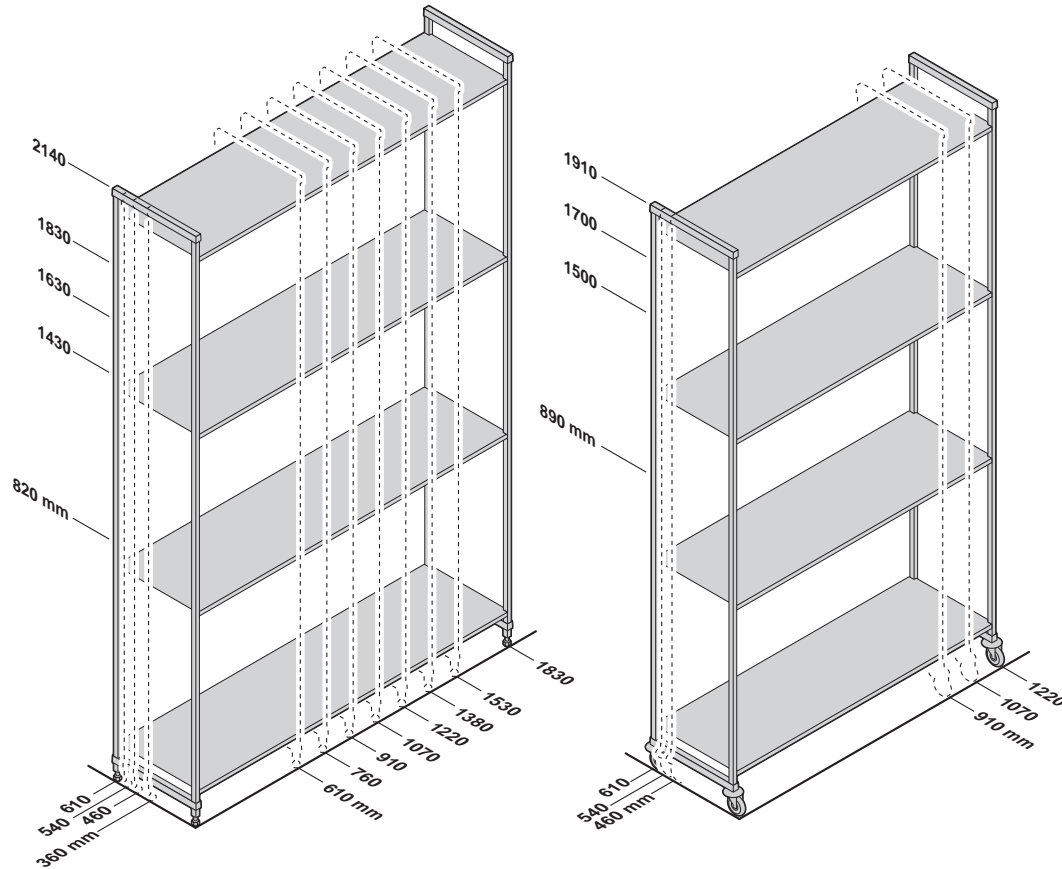


4 Shelf Unit Weight Bearing Chart

Single Unit

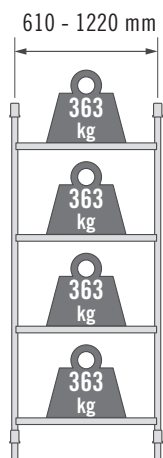


1451 kg
Maximum
Unit Capacity

Single Unit

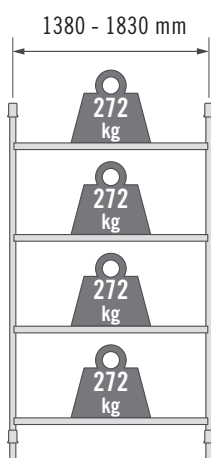


1089 kg
Maximum
Unit Capacity

Single Unit with
Dunnage Stand

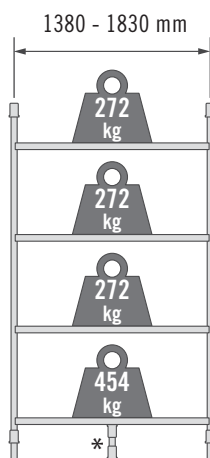


1270 kg
Maximum
Unit Capacity

Corner Unit with
2 Dunnage Stands

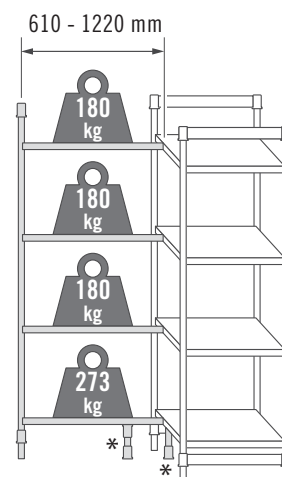

813 kg
Maximum
Unit Capacity

Mobile Unit

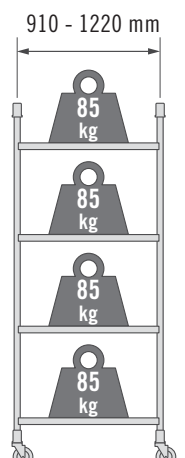

340 kg**
Maximum
Unit Capacity

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 1380 mm and longer, all Corner Units, U-Shape Units and units specified for heavier loads (see page 10).

** Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 340 kg.

Camshelving® Premium Series

Starter, Add-On and Mobile Units

These units make ordering easy and save time and labor during installation. Units ship complete in one box.*

Post kits are pre-assembled at the factory, speeding up on site set up.


*Due to unit weight and size, all 2140 mm high units and 1830 mm long units, all heights, ship in multiple boxes of post kits (unassembled) and shelf kits.



4-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	8
1630 mm	460 mm	610 mm 1220 mm
1830	540	760 1380
2140	610	910 1530
		1070 1830

1630 and 1830 mm
units ship in



1830 long and 2140 mm high
Add-on units ship in




1830 long and 2140 mm high
Starter units ship in



4-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	8
1630 mm	460 mm	610mm 1220 mm
1830	540	760 1380
2140	610	910 1530
		1070 1830

1630 and 1830 mm
units ship in



1830 long and 2140 mm high
Add-on units ship in



1830 long and 2140 mm high
Starter units ship in




4-Shelf Vented and Solid Stationary Starter and Add-On Units (3 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.

Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.



HEIGHTS	DEPTHS	LENGTHS
3	3	8
1630 mm	460 mm	610 mm 1220 mm
1830	540	760 1380
2140	610	910 1530
		1070 1830

1630 and 1830 mm
units ship in



1830 long and 2140 mm high
Add-on units ship in




1830 long and 2140 mm high
Starter units ship in





5-Shelf Vented Stationary Starter and Add-On Units


Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



1630 and 1830 mm units ship in  1

1830 long and 2140 mm high Add-on units ship in  2


1830 long and 2140 mm high Starter units ship in  3

HEIGHTS	DEPTHS	LENGTHS
3	3	8
1630 mm	460 mm	610 mm 1220 mm
1830	540	760 1380
2140	610	910 1530
		1070 1830

5-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



2140 mm Add-on units ship in  2

2140 mm Starter units ship in  3


HEIGHT	DEPTHS	LENGTHS
1	3	8
2140 mm	460 mm	610 mm 1220 mm
	540	760 1380
	610	910 1530
		1070 1830

5-Shelf Vented and Solid Stationary Starter And Add-On Units (4 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.

Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.




2140 mm Add-on units ship in  2

2140 mm Starter units ship in  3

HEIGHT	DEPTHS	LENGTHS
1	3	8
2140 mm	460 mm	610 mm 1220 mm
	540	760 1380
	610	910 1530
		1070 1830

4 or 5-Shelf Vented Mobile Starter Units

Mobile starter units include 2 factory assembled mobile post kits, shelves and 4 premium swivel casters with total locking brake.



HEIGHTS*	DEPTHS	LENGTHS
2	3	3
1700 mm	460 mm	910 mm
1910	540	1070
	610	1220

* Includes 127 mm casters.

Ships in  4



Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.



Camshelving® Premium Series Components

Stationary Post Kits

Post kit includes 2 unassembled stationary posts and 1 top and bottom post connector.

Stationary Posts cannot be used to build Mobile Units.



HEIGHTS	DEPTHS
5	3
820 mm	460 mm
1430	540
1630	610
1830	
2140	

Ships in  1

Mobile Post Kits

Mobile post kit includes 2 unassembled mobile posts, 1 top and bottom post connector and 2 premium swivel casters with total locking brake.

Mobile Posts cannot be used to build Stationary Units.



HEIGHTS*	DEPTHS
4	3
890 mm	460 mm
1500	540
1700	610
1910	

* Includes 127 mm casters.

Ships in  1

Vented and Solid Shelf Kits

For stationary or mobile units.
Available as a single shelf kit or in kits of 4 or 5 shelves in 1 box. Each kit includes shelf traverses and vented or solid shelf plates.



DEPTHS	LENGTHS	
3	8	
460 mm	610 mm	1220 mm
540	760	1380
610	910	1530
	1070	1830

Ships in  1

Shelf Traverses

Available in single or double packs.
Use a single set to add an open shelf for divider bars or drying racks. Add single traverses onto back posts for extra support when placing rolling equipment under the first shelf.



Single Pack LENGTHS		Double Pack LENGTHS
8		5
610 mm	1220 mm	910 mm
760	1380	1070
910	1530	1220
1070	1830	1380
		1530



Ships in  1

Camshelving® Premium Series Accessories

Bottom Shelf Dunnage Stands

Increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for starter units 1380 mm and longer and all corner units, intermediate units and units specified for heavier load volume on and off bottom shelves.

HEIGHTS*
2
190 mm
 289



Corner Connectors

Unique patented design ensures maximum shelf space utilization. Use 1 set per shelf to connect starter and add-on units in corners. Connect 4

or 5 intermediate shelves between 2 starter units (2 sets required per shelf). Available as a single set or 8 or 10 set packs.



Identification Tags

Clip onto shelf traverses to clearly identify stored product. Made of highly durable plastic with a clear slide in front panel. Labels included.

LENGTHS
2
76 mm
152



Wall Fastener

Use to secure stationary shelving unit to a wall for added safety and stability where required. Made of stainless steel. Screws not included.



Seismic Foot

Secure stationary unit posts directly to the floor for added safety and stability where required. Made of stainless steel. Bolts not included.



Premium Caster

Ideal in all areas of storage, especially coolers, freezers and/or wet areas. Made of highly durable, non-corrosive plastic with a 127 mm swivel,

non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.



Camshelving® Premium Series Accessories

Donut Bumper

Offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.

DIAMETER
1
127 mm



Shelf Divider

Stack and separate items stored on shelves. Made of highly durable ABS plastic. Installs directly onto solid or vented shelves. Easily removable for relocating or washing.

HEIGHT	DEPTHS
1	3
203 mm	460 mm 540 610



Shelf Divider Bars (for 610 mm deep shelf only)

Create a custom service or storage station for food pans, boxes or dish racks. Install straight or angled dividers directly onto shelf traverses.

DEPTH
1
610 mm



Shelf Rails

Install onto traverses and dovetails to prevent items from falling off sides and ends of shelves. Choose from single or double rail side kits and double rail only end kits.

DEPTHS	LENGTHS
4	8
360 mm	610 mm 1220 mm
460	760 1380
540	910 1530
610	1070 1830



102 mm High Double Rail



51 mm High Single Rail



End Rail



Tray Sliding Rack (for 610 mm deep shelf only)

Holds up to 6 each full size (1826) 46 x 66 cm or 12 half size (1318) 32 x 45 cm sheet pans or trays. Install 1 or more units onto vented shelves, any length. High quality, lightweight aluminum material is safe for use in coolers and freezers. Made from aluminum 6463 (6000 series).

DEPTH
1
584 mm



Camshelving® Premium Series Accessories

Single Shelf Security Cage (for 610 mm deep shelf only)

Securely store valuable products on a single shelf. Made of heavy duty, 304 stainless steel for use in any environment. Requires 457 mm height between shelves. Install on vented shelves only. Lock not included.

DEPTH	LENGTH
1	1
640 mm	1080 mm



Full-Wrap Security Cage (for 610 mm deep shelf only)

Store valuable products behind locked doors. Made of heavy-duty 304 stainless steel for use in any environment. Stationary or mobile units ship complete with factory assembled post kits, 2 vented shelves, 4 premium swivel casters with total locking brake for mobile unit and 1 full wrap security cage. Assembly required. Lock not included.

Stationary HEIGHT	Mobile HEIGHT*	DEPTH	LENGTH
1	1	1	1
1638 mm	1721 mm	680 mm	1276 mm

* Includes 127 mm casters.

Fit only Camshelving Premium Series made in the USA. Special Order. Allow 10 to 12 weeks for delivery for International delivery.

Cage only ships in



Units ship in



Vertical Drying and Storage Cradle (for 610 mm deep shelf only)

Modular 7-slot rack designed for drying and storing trays, sheet pans, cutting boards and lids. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 3 pack.

DEPTH
1
597 mm



Vertical Drying and Storage Rack

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Units ship complete with factory assembled mobile post kits, 6 traverses, 12 or 15 vertical drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTHS	HOLDS Trays
1	1	2	
1910 mm	610 mm	1220 mm 1530	84 105

* Includes 127 mm casters.

1220 mm long unit ships in



1530 mm long unit ships in



Camshelving® Premium Series Accessories

Dome Drying and Storage Cradle (for 540 mm deep shelf only)

Use to dry and safely store up to 10 patient meal delivery domes or plate covers upright. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 5 pack.

DEPTH
1
520 mm

Fit only Camshelving Premium Series made in the USA. Special Order. Allow 10 to 12 weeks for delivery for International delivery.



Dome Drying and Storage Rack

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Unit ships complete with factory assembled mobile post kits, 10 traverses, 10 dome drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTH	HOLDS Domes
1	1	1	
1910 mm	540 mm	910 mm	100

* Includes 127 mm casters.

Camshelving Premium Series made in the USA. Special Order. Allow 10 to 12 weeks for delivery for International delivery.



Angled Drying and Storage Cradle (for 600 mm deep shelf only)

Uniquely designed cradle holds up to 8 each meal delivery pellets or use to dry, store and transport food pans and other commercial kitchen ware. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 4 pack.

DEPTH
1
592 mm



Angled Drying and Storage Rack

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Units ship complete with 2 mobile post kits, 8 traverses, 16 angled drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTH	HOLDS Pellets, Bases / GN 1/1 Food Pans
1	1	1	
1910 mm	610 mm	1220 mm	128 / 16

* Includes 127 mm casters.



Camshelving® Premium Series

High Density Storage Floor Track System

Maximize storage capacity by creating storage aisles in all available space. This simple system is composed of stationary starter units anchored to a raised floor track system at both ends with high density mobile units installed in between. Easy to install track requires no drilling or gluing.



High Density Mobile Units are available with factory assembled post kits, vented or solid shelves and high density casters and bumpers. Full track and extension kits ship complete with required hardware. Stationary Starter Units are required to anchor the system at both ends.



Raised Floor Track provides a smooth and level surface to easily roll mobile units. Raised track ensures dirt will not get trapped and is easy to clean. Aluminum track and stainless steel hardware are rust resistant.



* It is recommended to use a stationary unit for every 4,5 m of track to further stabilize the system.



Grooved casters roll easily and securely on raised track.




Raised track connects easily to the bottom of a stationary unit that works as a system anchor. No bolts, no glue or drilling into the floor are required. Easy and fast set up.

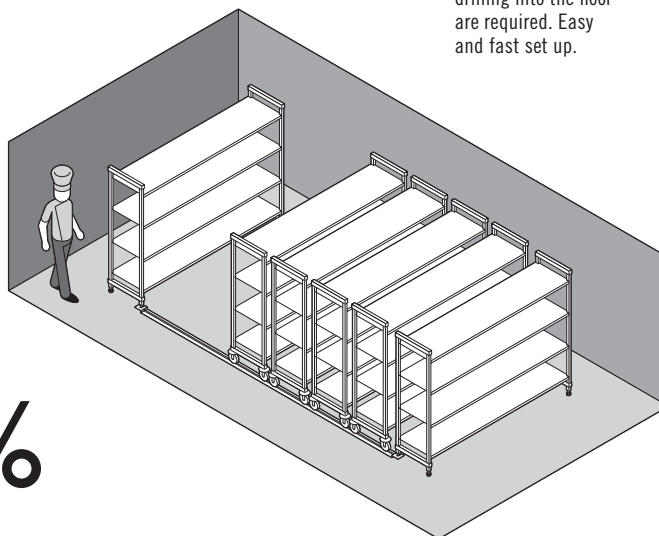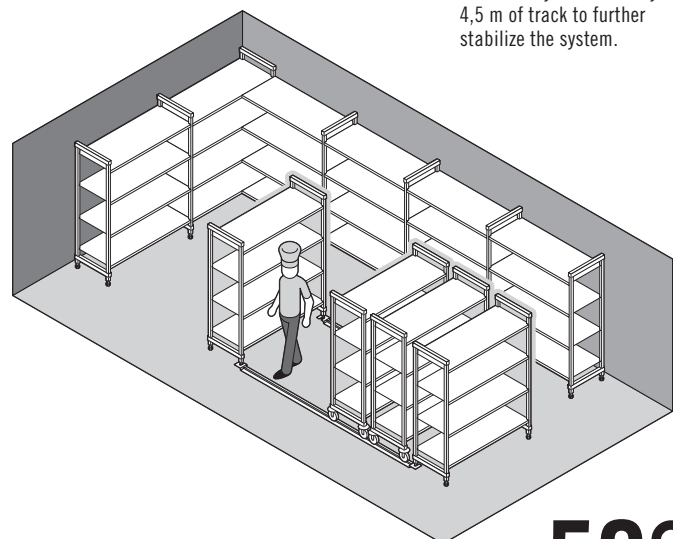

Increases Storage Capacity Up To **50%**

4-Shelf Vented High Density Mobile Starter Units

Units include 2 factory assembled mobile post kits, 4 shelves, 4 high density casters and 4 high density bumpers.

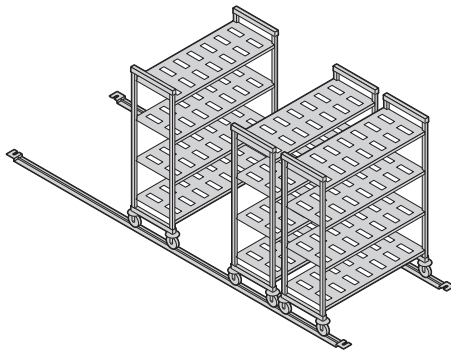


HEIGHTS*	DEPTHS	LENGTHS
2	2	5
1700 mm	540 mm	910 mm
1910	610	1070
		1220
		1380
		1530

* Includes 127 mm casters.

Ships in  1

4-Shelf Solid High Density Mobile Starter Units

Units include 2 factory assembled mobile post kits, 4 shelves, 4 high density casters and 4 high density bumpers.

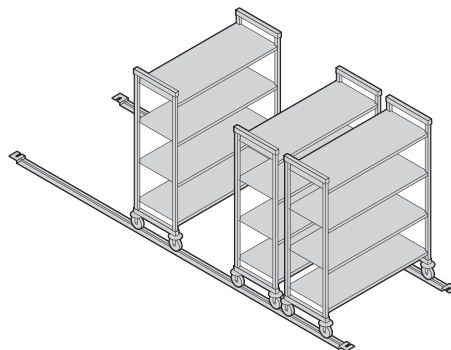

HEIGHTS*	DEPTHS	LENGTHS
2	2	5
1700 mm	540 mm	910 mm
1910	610	1070
		1220
		1380
		1530

* Includes 127 mm casters.

Ships in  1

Full Track and Extension Kits

Aluminum raised track kits and track extensions ship complete in 1 box. Each kit includes all stainless steel hardware necessary to complete a floor installation.

It is highly recommended to install a stationary starter unit every 4,6 m of track to further stabilize the system.



Full Track LENGTHS	Track Extension LENGTHS
3	3
3,05 m	1,38 m
3,66	1,53
4,42	1,83

Ships in  1

High Density Caster with Donut Bumper

Grooved caster rolls easily and securely on raised track. Donut bumper protects mobile units from coming into direct contact with each other.



CAMSHELVING® ELEMENTS series

WHY CHOOSE ELEMENTS?

Made from a revolutionary, extremely strong composite material with a smooth, easy to clean surface. Elements Series is stronger than common wire shelving. It's lighter in weight than Camshelving Premium Series and totally impervious to moisture, chemicals and liquids that can destroy shelving over time. Elements Series is designed for medium to heavy storage use in freezers, coolers, dry storage or warewashing areas. It easily supports the performance demands of a busy foodservice operation.



All Environments
-38°C TO 88°C

Stationary

Mobile

camguard®
ANTIMICROBIAL SHELF PLATES



storage needs
MEDIUM to HEAVY

weekly
deliveries

5 – 7




COMPONENT




Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, Tray Slide Rack, and Shelf Divider Bars are not NSF Listed.


Camshelving® Elements Series Stationary Unit Sizes

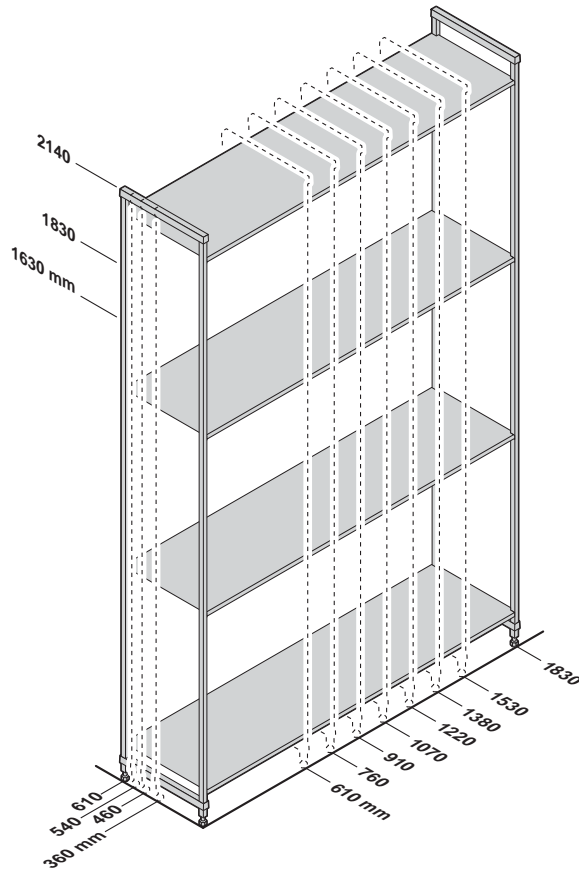

Mobile Unit Sizes

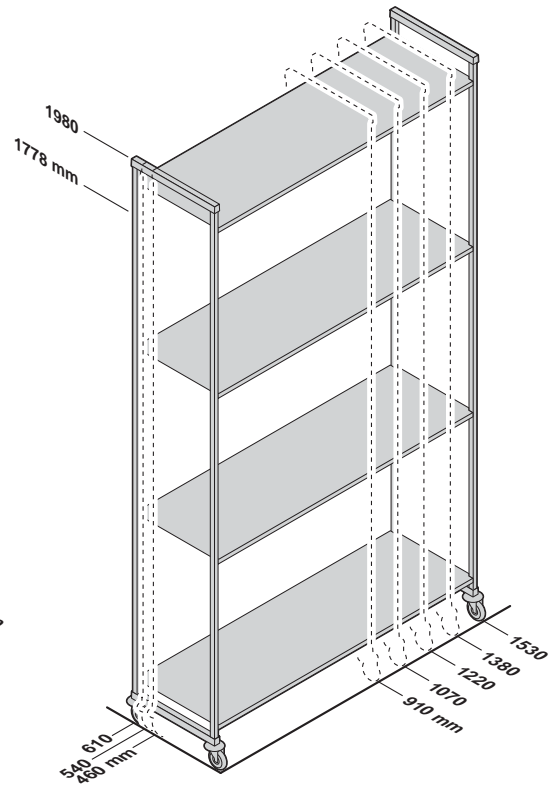

4 Shelf Unit Weight Bearing Chart

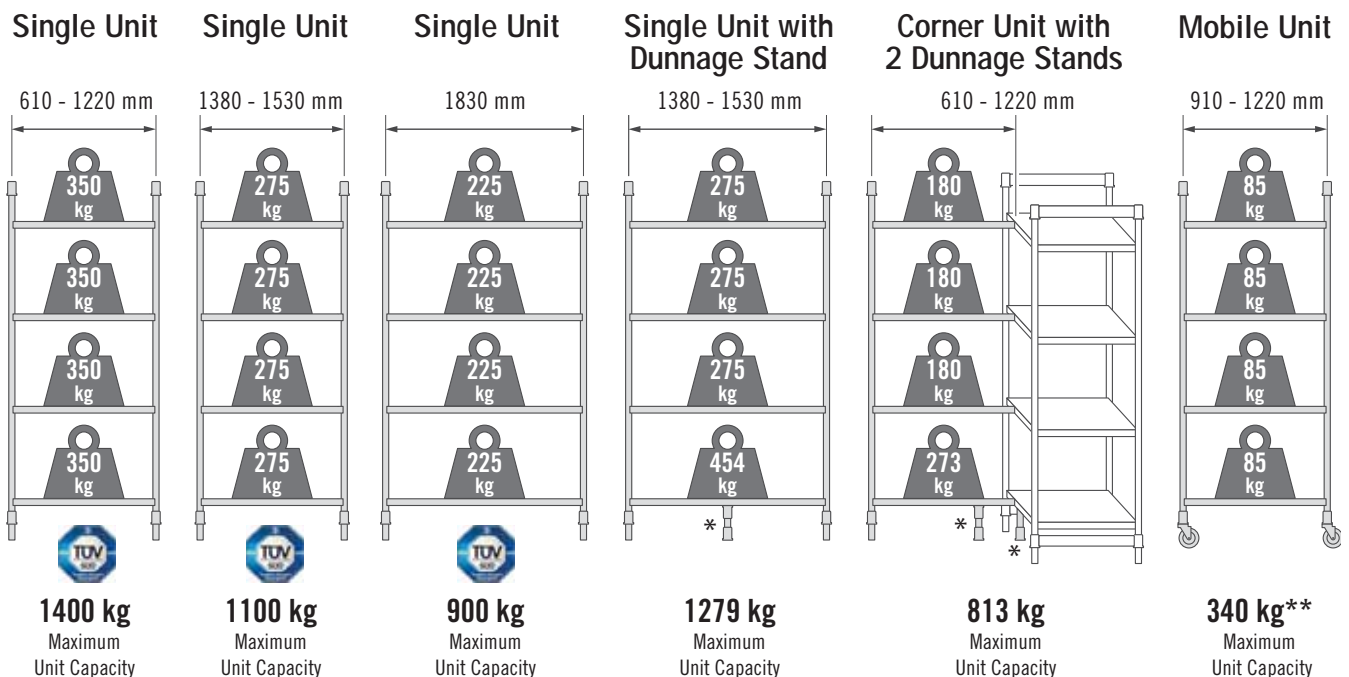

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 1380 mm and longer, all Corner Units, U-Shape Units and units specified for heavier loads (see page 10).

** Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 340 kg.

Camshelving® Elements Series


Starter, Add-On and Mobile Units

These units make ordering easy and saves time and labor during installation. Units ship complete in one box. Post kits are pre-assembled at the factory, speeding up on site set up.



4-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.
Add-On units include 1 factory assembled post kit and shelves.




HEIGHTS	DEPTHS	LENGTHS	
3	3	8	
1630 mm	460 mm	610 mm	1220 mm
1830	540	760	1380
2140	610	910	1530
		1070	1830

Ships in  1

4-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.
Add-On units include 1 factory assembled post kit and shelves.

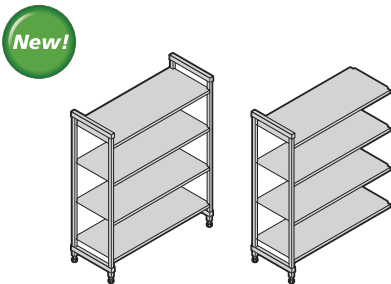

HEIGHTS	DEPTHS	LENGTHS	
3	3	8	
1630 mm	460 mm	610 mm	1220 mm
1830	540	760	1380
2140	610	910	1530
		1070	1830

Ships in  1

4-Shelf Vented and Solid Stationary Starter and Add-On Units (3 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.
Add-On units include 1 factory assembled post kit and shelves.
Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.




HEIGHTS	DEPTHS	LENGTHS	
3	3	8	
1630 mm	460 mm	610 mm	1220 mm
1830	540	760	1380
2140	610	910	1530
		1070	1830

Ships in  1

5-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.




HEIGHTS	DEPTHS	LENGTHS	
3	3	8	
1630 mm	460 mm	610 mm	1220 mm
1830	540	760	1380
2140	610	910	1530
		1070	1830

Ships in  1

5-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



HEIGHT	DEPTHS	LENGTHS	
1	3	8	
2140 mm	460 mm	610 mm	1220 mm
	540	760	1380
	610	910	1530
		1070	1830


Ships in  1

5-Shelf Vented and Solid Stationary Starter And Add-On Units (4 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.

Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products.
Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.




HEIGHT	DEPTHS	LENGTHS	
1	3	8	
2140 mm	460 mm	610 mm	1220 mm
	540	760	1380
	610	910	1530
		1070	1830

Ships in  1

4 or 5-Shelf Vented Mobile Starter Units

Mobile starter units include 2 factory assembled mobile post kits, shelves and 4 premium swivel casters with total locking brake.



HEIGHTS*	DEPTHS	LENGTHS	
2	3	5	
1778 mm	460 mm	910 mm	1380 mm
1980	540	1070	1530
	610	1220	

* Includes 127 mm casters.

Ships in  1



Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.




Camshelving® Elements Series Components

Stationary Post Kits

Post kit includes 2 unassembled stationary posts and 1 top and bottom post connector and post connector wedges.

Stationary Posts cannot be used to build Mobile Units.



HEIGHTS	DEPTHS
3	4
1630 mm	360 mm
1830	460
2140	540
	610

Ships in  1

Mobile Post Kits

Mobile post kit includes 2 unassembled mobile posts, 1 top and bottom post connector, post connector wedges and 2 premium swivel casters with total locking brake.

Mobile Posts cannot be used to build Stationary Units.



HEIGHTS	DEPTHS
2	3
1778 mm	460 mm
1980	540
	610

Ships in  1

Vented and Solid Shelf Kits

For stationary or mobile units.

Available as a single shelf or kits of 4 or 5 shelves (stationary only). Each kit includes stationary or mobile shelf traverses, stationary or mobile shelf traverse dovetails and vented or solid shelf plates.



Stationary		Mobile	
DEPTHS	LENGTHS	DEPTHS	LENGTHS
4	8	3	5
360 mm	610 mm	460 mm	910 mm
*460	760	540	1070
*540	*910	610	1220
*610	*1070		1380
	*1220		1530
	1380		
	1530		
	1830		

* Sizes available for kits of 4 or 5 shelves.

Ships in  1

Shelf Traverses

Available in single or double packs, stationary or mobile. Use two traverses to add an open shelf for divider bars or drying cradles. Add one stationary traverse onto back posts of a stationary unit for extra support when placing rolling equipment under the first shelf. Traverse dovetails included.



Stationary		Mobile	
Single Pack	Double Pack	Single Pack	Double Pack
LENGTHS	LENGTHS	LENGTHS	LENGTHS
8	5	5	5
610 mm	910 mm	910 mm	910 mm
760	1070	1070	1070
910	1220	1220	1220
1070	1380	1380	1380
1220	1530	1530	1530
1380			
1530			
1830			


Ships in  1

Camshelving® Elements Series Accessories

Bottom Shelf Dunnage Stands

Increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for starter units 1380 mm and longer and all corner units, intermediate units and units specified for heavier load volume on and off bottom shelves.

HEIGHTS*
2
165 mm
 267



Corner Connectors

Unique patented design ensures maximum shelf space utilization. Use 1 set per shelf to connect starter and add-on units in corners. Connect 4

or 5 intermediate shelves between 2 starter units (2 sets required per shelf). Available as a single set or 8 or 10 set packs.



Identification Tags

Clip onto shelf traverses to clearly identify stored product. Made of highly durable plastic with a clear slide in front panel. Labels included.

LENGTHS
2
76 mm
152



Wall Fastener

Use to secure stationary shelving unit to a wall for added safety and stability where required. Made of stainless steel. Screws not included.



Seismic Foot

Secure stationary unit posts directly to the floor for added safety and stability where required. Made of stainless steel. Bolts not included.



Camshelving® Elements Series Accessories

Premium Caster

Ideal in all areas of storage, especially coolers, freezers and/or wet areas. Made of highly durable, non-corrosive plastic with a 127 mm swivel, non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.



Donut Bumper

Offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.

DIAMETER
1
127 mm



Shelf Divider

Stack and separate items stored on shelves. Made of highly durable ABS plastic. Installs directly onto solid or vented shelves. Easily removable for relocating or washing.

HEIGHT	DEPTHS
1	3
203 mm	460 mm 540 610



Shelf Divider Bars (for 610 mm deep shelf only)

Create a custom service or storage station for food pans, boxes or dish racks. Install straight or angled dividers directly onto shelf traverses.

DEPTH
1
610 mm



Tray Sliding Rack (for 610 mm deep shelf only)

Holds up to 6 each full size (1826) or 12 half size (1318) sheet pans or trays. Install 1 or more units onto vented shelves, any length. High quality, lightweight aluminum material is safe for use in coolers and freezers. Made from aluminum 6463 (6000 series).

DEPTH
1
584 mm



Camshelving® Elements Series Accessories

Single Shelf Security Cage (for 610 mm deep shelf only)

Securely store valuable products on a single shelf. Made of heavy duty, 304 stainless steel for use in any environment. Requires 457 mm height between shelves. Install on vented shelves only. Lock not included.

DEPTH	LENGTH
1	1
640 mm	1080 mm



Vertical Drying and Storage Cradle (for 610 mm deep shelf only)

Modular 7-slot rack designed for drying and storing trays, sheet pans, cutting boards and lids. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 3 pack.

DEPTH
1
597 mm



Vertical Drying and Storage Rack

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Units ship complete with factory assembled mobile post kits, 6 mobile shelf traverses, mobile shelf traverse dovetails, 12 or 15 vertical drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTHS	HOLDS
1	1	2	Trays
1980 mm	610 mm	1220 mm 1530	84 105

* Includes 127 mm casters.

1220 mm long
unit ships in



5

1530 mm long
unit ships in



6




Camshelving® Elements Series Accessories

Dome Drying and Storage Cradle (for 540 mm deep shelf only)

Use to dry and safely store up to 10 patient meal delivery domes or plate covers upright. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 5 pack.

DEPTH
1
520 mm



Angled Drying and Storage Cradle (for 610 mm deep shelf only)

Uniquely designed cradle holds up to 8 each meal delivery pellets or use to dry, store and transport food pans and other commercial kitchen ware. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 4 pack.

DEPTH
1
592 mm



Angled Drying and Storage Rack

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Unit ships complete with factory assembled mobile post kits, 8 mobile shelf traverses, mobile shelf traverse dovetails, 16 angled drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTH	HOLDS
1	1	1	Pellets, Bases / GN 1/1 Food Pans
1980 mm	610 mm	1220 mm	128 / 16

* Includes 127 mm casters.



CAMSHELVING® BASICS series

WHY CHOOSE BASICS?

Just because the budget is tight and storage needs are less rigorous, it doesn't mean that shelving performance and storage efficiencies should be compromised. Basics Series is made from the same high performing, strong composite material as Elements Series and has the same design features. It's lighter in weight and less in cost but still strong enough to handle light to medium storage demands.



All Environments
-38°C TO 88°C

Stationary




Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, and Tray Slide Rack are not NSF Listed.




storage needs
LIGHT to MEDIUM

weekly
deliveries
2 – 5

Camshelving® Basics Series
Stationary Unit Sizes

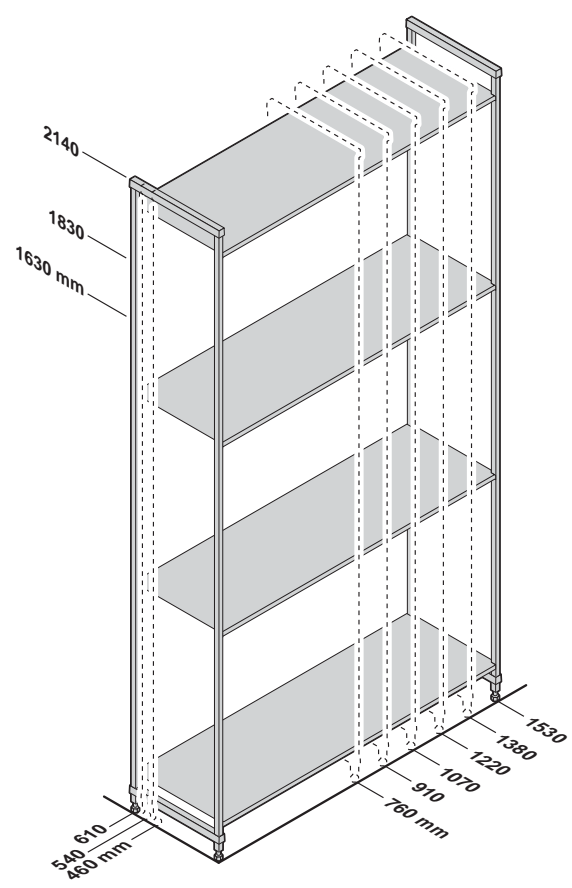

4 Shelf Unit Weight Bearing Chart

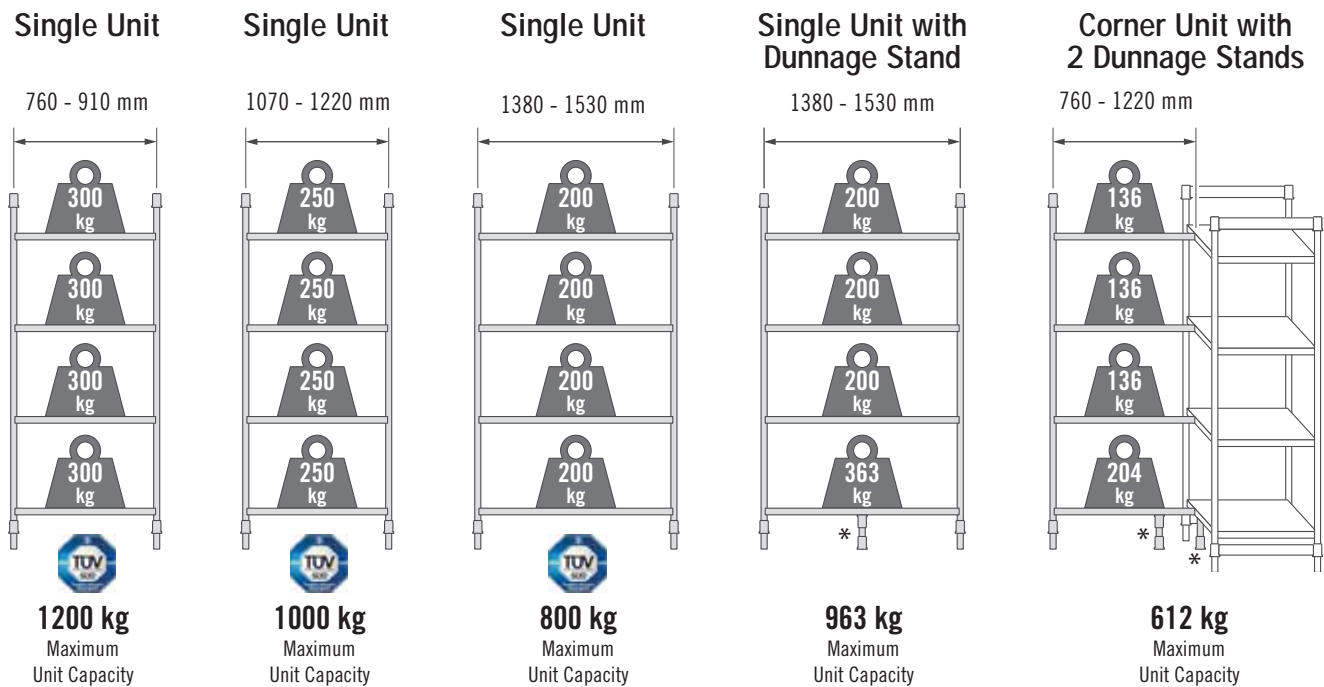

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 1380 mm and longer, all Corner Units, U-Shape Units and units specified for heavier loads (see page 10).

Camshelving® Basics Series

Starter, and Add-On Units


These units make ordering easy and saves time and labor during installation. Units ship complete in one box. Post kits are pre-assembled at the factory, speeding up on site set up.



4-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.




HEIGHTS	DEPTHS	LENGTHS	
3	3	6	
1630 mm	460 mm	760 mm	1220 mm
1830	540	910	1380
2140	610	1070	1530

Ships in  1

4-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS	
3	3	6	
1630 mm	460 mm	760 mm	1220 mm
1830	540	910	1380
2140	610	1070	1530


Ships in  1

4-Shelf Vented and Solid Stationary Starter and Add-On Units (3 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.

Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.




HEIGHTS	DEPTHS	LENGTHS	
3	3	6	
1630 mm	460 mm	760 mm	1220 mm
1830	540	910	1380
2140	610	1070	1530

Ships in  1

5-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.




HEIGHTS	DEPTHS	LENGTHS
3	3	6
1630 mm	460 mm	760 mm 1220 mm
1830	540	910 1380
2140	610	1070 1530



5-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.



HEIGHT	DEPTHS	LENGTHS
1	3	6
2140 mm	460 mm	760 mm 1220 mm
	540	910 1380
	610	1070 1530




5-Shelf Vented and Solid Stationary Starter And Add-On Units (4 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.

Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products.
Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.



HEIGHT	DEPTHS	LENGTHS
1	3	6
2140 mm	460 mm	760 mm 1220 mm
	540	910 1380
	610	1070 1530



Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.



Camshelving® Basics Series Components

Stationary Post Kits

Post kit includes 2 unassembled stationary posts and 1 top and bottom post connector and post connector wedges.



HEIGHTS	DEPTHS
3	3
1630 mm	460 mm
1830	540
2140	610

Ships in  1

Vented and Solid Shelf Kits

Available as a single shelf or kits of 4 or 5 shelves. Each kit includes shelf traverses, shelf traverse dovetails and vented or solid shelf plates.



DEPTHS	LENGTHS
3	6
*460 mm	760 mm
*540	*910
*610	*1070
	*1220
	1380
	1530

* Sizes available for kits of 4 or 5 shelves.

Ships in  1

Shelf Traverses

Available in single or double packs. Use a single set to add an open shelf for divider bars or drying racks. Add single traverses onto back posts for extra support when placing rolling equipment under the first shelf.



Single Pack LENGTHS	Double Pack LENGTHS
6	5
760 mm	910 mm
910	1070
1070	1220
1220	1380
1380	1530
1530	


Ships in  1

Camshelving® Basics Series Accessories

Bottom Shelf Dunnage Stands

Increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for starter units 1380 mm and longer and all corner units, intermediate units and units specified for heavier load volume on and off bottom shelves.

HEIGHTS*
2
171 mm
 273



Corner Connectors

Unique patented design ensures maximum shelf space utilization. Use 1 set per shelf to connect starter and add-on units in corners. Connect 4

or 5 intermediate shelves between 2 starter units (2 sets required per shelf). Available as a single set or 8 or 10 set packs.



Identification Tag

Clip onto shelf traverses to clearly identify stored product. Made of highly durable plastic with a clear slide in front panel. Labels included.

LENGTH
1
152 mm



Wall Fastener

Use to secure stationary shelving unit to a wall for added safety and stability where required. Made of stainless steel. Screws not included.



Camshelving® Basics Series Accessories

Seismic Foot

Secure stationary unit posts directly to the floor for added safety and stability where required. Made of stainless steel. Bolts not included.



Shelf Divider

Stack and separate items stored on shelves. Made of highly durable ABS plastic. Installs directly into solid or vented shelves. Easily removeable for relocating or washing.

HEIGHT	DEPTHS
1	3
203 mm	460 mm 540 610



Tray Sliding Rack (for 610 mm deep shelf only)

Holds up to 6 each full size (1826) or 12 half size (1318) sheet pans or trays. Install 1 or more units onto vented shelves, any length. High quality, lightweight aluminum material is safe for use in coolers and freezers. Made from aluminum 6463 (6000 series).

DEPTH
1
610 mm



Single Shelf Security Cage (for 610 mm deep shelf only)

Securely store valuable products on a single shelf. Made of heavy duty, 304 stainless steel for use in any environment. Requires 457 mm height between shelves. Install on vented shelves only. Lock not included.

DEPTH	LENGTH
1	1
640 mm	1080 mm



Camshelving® Basics Series Accessories

Vertical Drying and Storage Cradle (for 610 mm deep shelf only)

Modular 7-slot rack designed for drying and storing trays, sheet pans, cutting boards and lids. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 3 pack.

DEPTH
1
597 mm



Dome Drying and Storage Cradle (for 540 mm deep shelf only)

Use to dry and safely store up to 10 patient meal delivery domes or plate covers upright. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 5 pack.

DEPTH
1
520 mm



Angled Drying and Storage Cradle (for 610 mm deep shelf only)

Uniquely designed cradle holds up to 8 each meal delivery pellets or use to dry, store and transport food pans and other commercial kitchen ware. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 4 pack.

DEPTH
1
592 mm



Additional Camshelving® Accessories

Camrack® Open End Tray Rack

Open end on one side for easy placement and removal of shelf plates.

HOLDS
Shelf Plates

9



NSF

Camshelving® Wall Shelves

Features virtually indestructible I-beam supports that hold up to 68 kg per shelf. Durable polypropylene withstands temperatures up to 88°C, and will not rust or corrode. Includes all hardware for installation. Easy to remove and clean without tools.

DEPTHS	LENGTHS
2	2
360 mm	910 mm
460	1220



NSF
COMPONENT



Shelf Extenders

Convert empty wall space into a functional, vertical storage area. Peg strips withstand temperatures up to 88°C, and will not rust or corrode.

LENGTHS
2
910 mm
1222



S-Series Dunnage Racks

Keep frozen, cold or dry inventory 30,5 cm safely off the floor. Heavy duty polypropylene is safe to -38°C and will not rust, corrode or bend.

HEIGHT	DEPTH	LENGTHS	Weight CAPACITY KG
1	1	4	
300 mm	540 mm	760 mm	454
		910	1361
		1220	
		1530	



Camlink® Connectors

Securely lock dunnage racks together for greater stability.



NSF

INTRODUCTION

NEW TO SHELVING?

START HERE

BASICS

PREMIUM

ELEMENTS

COMPARE ALL 3

STRENGTH

MAX WEIGHT

CHECK IT OUT

CODE LOOKUP

SHELVING LAYOUTS

WATCH VIDEOS

VIEW GALLERY

SHELVING DESIGN SERVICE. ON THE HOUSE.

Connect with our design center to launch your Shelving For Life experience.

Home

Compare All Three

New To Shelving?

Weight Test

Code Lookup

Shelving Layouts

Videos

Gallery

Assembly

The Shelf Life: Tips & Ideas

Shelving For Life Customers

FREE Design Service

Warranty

Cambro Blog

Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.



CAMBRO U.S.A.
TEL: 1(714) 848-1555
FAX: 1(714) 230-4375
international@cambro.com

惠州勘宝商业有限公司
电话: 0752 2387033
传真: 0752 2387019
cambrochina@cambro.com

© Copyright Cambro Manufacturing Company. Printed in the U.S.A.
LITX16CPSHELVEN

